



2 Inch Printer


4 inch printer overleaf

Open the printer by pulling the release levers towards you and lift the cover. Remove the old ribbon by sliding the cardboard cores to the right, then pulling the left end towards you.



Discard the old ribbon into the rubbish. Remove the NEW ink ribbon from the plastic packet. Note only one end has notches cut out of the cardboard cores. This is the LEFT side

One roll is fully wound with ink ribbon, the other has the end of the ink ribbon attached. This empty roll should be dropped down through the opening under the rear roll mount.

Slide the core to the right (compressing the spring) and then attach the left end of the core to the left side core holder. Start with the larger roll of the ink ribbon. This goes on the **TOP** holder. Place the end without notches on the right core holder.

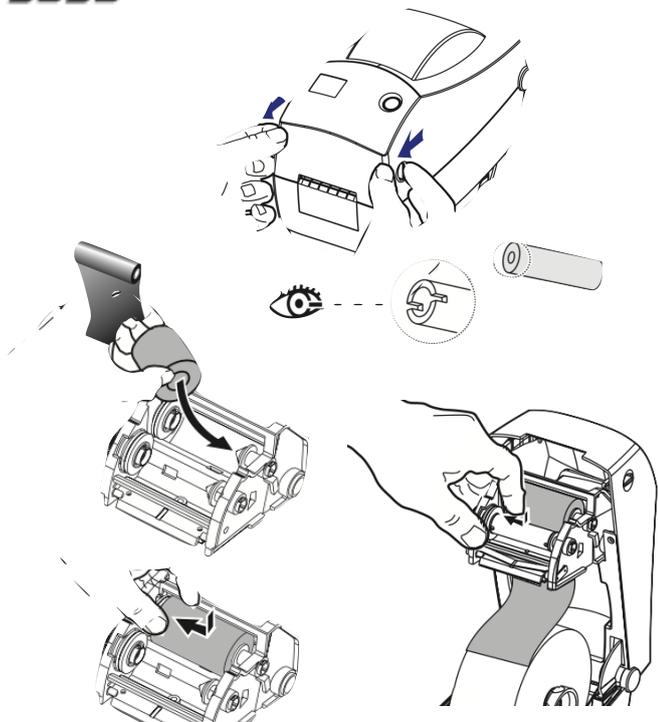

Now insert the core on the other end of the ink ribbon to the **Lower** set of core holders. Its very important that the notch cut out the the cardboard core lines up with the lugs on the left side core on both rolls

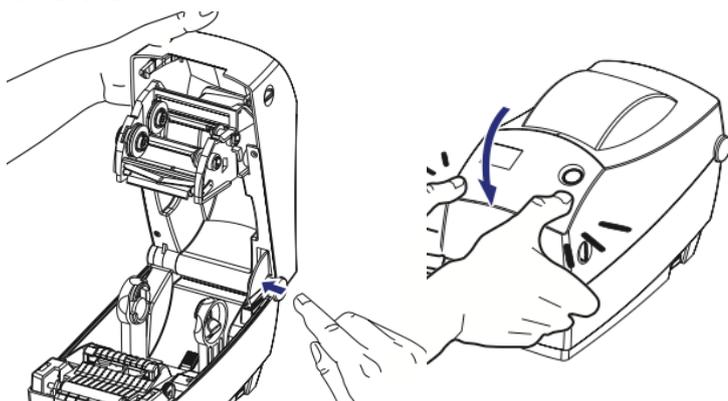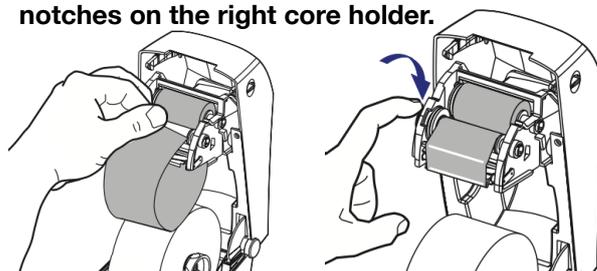

Roll the wheel on the left side core holder away from you to take up any slack in the ribbon. Close the top cover. Remember that you need to release the cover lock, lower the top cover, and press down until the latches snap into place..

when you close lid if green light is flashing press button on top once to realign

To view video goto www.filterfab.com and click *help* tab



Australia
New Zealand

ph: 07 3205 3844
ph: 03 379 8131

Email: sales@filterfab.com
Email: filternz@filterfab.com

